



# TSN-660M/600 Series

## Eyepieces



TE-9Z  
82SV 660M 600  
20~60× ZOOM



TE-14WD  
82SV 660M 600  
30× WIDE



TE-17HD  
82SV 660M 600  
25× LER



TSN-664M PROMINAR  
XD Lens Straight Type

TSN-663M PROMINAR  
XD Lens Angled Type

XD MC WP KR

TSN-664M PROMINAR  
XD Lens Straight Type

XD MC WP KR

These high performance models are the perfect fusion of compactness and high optical performance. This series satisfies the needs of a wide range of users from beginning bird watchers to scientists and professional researchers.

\* Eyepieces are sold separately.



TSN-602  
Normal Lens Straight Type

TSN-601  
Normal Lens Angled Type

MC WP KR

TSN-602  
Normal Lens Straight Type

MC WP KR

These 60mm class scopes boast an unprecedented light weight. Since carrying and handling is so easy, anyone can enjoy viewing and observation.

\* Eyepieces are sold separately.



## Digital Camera Adapter



TSN-DA1  
550 660M  
600 82SV

Digital camera adapter for the TSN-82SV/660/600 and TSN-550 series. It should be used in combination with the universal camera adapter and the adapter rings.



TSN-DA10  
880 770  
556

Digital camera adapter for the TSN-880/770 series and Telephoto Lens/Scope. It should be used in combination with the universal camera adapter and the adapter rings.



TSN-DA20  
550 660M  
600 82SV

Digital camera adapter for the TSN-82SV/660/600 and TSN-550 series. It should be used in combination with the universal camera adapter and the adapter rings.



TSN-DA4

Universal camera adapter that allows the mounting of various digital cameras. It has an opening and closing type configuration that enables easy switching between viewing and photographing. (For details of cameras that can be used, please refer to p.26.)

## Adapter Rings



TSN-AR28/30/305/  
37/43/46/52/55/58/  
62/72

The appropriate adapter ring should be selected according to the camera filter thread. (11 types)

## Photo Attachment



TSN-PA7A 880 770 556

TSN-PA8 82SV 660M 600

This photo adapter slides directly over the spotting scope eyepiece and secures onto the supplied inner collar at the scope body. A T2 mount attaches D-SLR Camera to TSN-PA7A/PA8.



TSN-PZ

880 770 556 660M 600

Zoom-type photo attachment that allows use of a 680-1000mm focal length. (TSN-660M/600 is 560-840mm.) It is exclusively for use with digital SLR cameras, and allows brighter, higher resolution photographing than before.  
\* Attachment supporting APS-C and Four Thirds formats.  
The 35mm format converted focal length will be approximately 1.5 times the situation in APS-C format, and approximately 2 times the situation in Four Thirds format.  
\* In the case of using a 35mm full size digital SLR camera, this can only be used at 1000mm.

## Eyepiece Converter



TSN-EC1A

Required when using a TSN-82SV/660M/600 series eyepiece with a TSN-820/820M series.



TSN-EC2

Required when using a previous model TSN-820/820M series eyepiece with a TSN-880/770 series.



TSN-EC3

Required when using a TSN-660M/600 series eyepiece with a TSN-880/770 series.



TSN-CR3

Should be used when mounting TSN-VA2B/TSN-PZ on TSN-660M/600 series.

When other model eyepieces are used with TSN-880/770 Series scopes, not only will the specifications including the magnification change, but there may be cases where an adequate optical performance cannot be obtained.

## Universal Mount System



TSN-DA3

(For straight/angled type spotting scopes)

Accessory that allows secure fixing of spotting scope and video camera.  
\* When used with angled spotting scope, the TSN-DA3-88A is required.



TSN-DA3st

(Only for straight type spotting scopes)

With a more compact structure than the TSN-DA3, this is convenient for carrying and storage.  
\* Cannot be used with angled spotting scopes.



TSN-DA3-88A

\*TSN-DA3-88A is necessary to use the TSN-DA3 with the TSN-881/883/771/773.

## Universal Camera Adapter

## Universal Shoe



TSN-DA3-40

Use the Universal Shoe for mounting video camera that have their lens in a high position, such as vertical format video cameras. Height: 40mm

## Universal Shoe



TSN-BP

Can be used for forward and backward balance adjustment during digiscoping use. It should be used by mounting it on a tripod head (1/4 inch screw).

## Short Sleeve



TSN-SS1

Extends the outer tube of the TSN-DA1/DA10. (Approx.7mm)

## Sleeve



TSN-LS2

Should be used when carrying out digiscoping using the TE-9Z. Zoom operation is possible with the adapter still mounted.

## Camera Mount(T-Ring)



TSN-CM2-CE/CM/N/K/SE/M4/3

Find the appropriate mount by matching it to the camera manufacturer.

\* CE (Canon EOS), CM(Canon EFM),N (Nikon F), K (Pentax K), SE (Sony E), and M4/3(Micro Four Thirds)

## SLR Camera Adapter Ring



TSN-AR42GT

550 82SV 660M 600

SLR Camera Adapter Ring for TSN-82SV, TSN-660M/600 and TSN-550 series. This is used between the TSN-DA1 and TSN-CM2.

## Protection Filter



TP-95FT

880 556

Filter Thread: 95mm  
Protective filter that has had water repellent and oil repellent processing applied. Even if fingerprints or water droplets become attached to the filter, they can be easily wiped off.

## Carrying Cases



for TSN-880 Series

C-881 (for angled type scopes)

C-882 (for straight type scopes)



for TSN-770 Series

C-771 (for angled type scopes)

C-772 (for straight type scopes)



for TSN-660M Series

C-661 (for angled type scopes)

C-662 (for straight type scopes)



for TSN-600 Series

C-601 (for angled type scopes)

C-602 (for straight type scopes)



for TSN-82SV

C-821 (for angled type scopes)

## Stay-on Case



for TSN-550 Series

C-553 (for angled type scopes)



for TSN-550 Series

C-554 (for straight type scopes)



for TSN-500 Series

C-500 B/G/C/R/D

(for TSN-501 / 502)

## Hand Strap



for TSN-550/500 Series

TSN-HD (use with C-550/500)

## Only for U.S.A. market



for TSN-880 Series

CNW-12 straight type

CNW-11 angled type



for TSN-770 Series

CNW-14 straight type

CNW-13 angled type

straight type



TSN-82SV  
CNW-5 angled type

TSN-660M Series  
CNW-10 straight type

CNW-9 angled type



TSN-600 Series  
CNW-4 straight type

CNW-3 angled type

Eyepiece Protection Cover



TSN-CV88

TSN-CV66

Protect Filter



TSE-FL

TSN-82SV



TSE-FL66


TSN-660M Series

# Digiscoping/Videoscoping System Chart



## Super-Telephotography with a Single Lens Reflex Camera

Attach a 35mm film single lens reflex camera or digital single lens reflex camera to a Kowa spotting scope for super-telephotography.

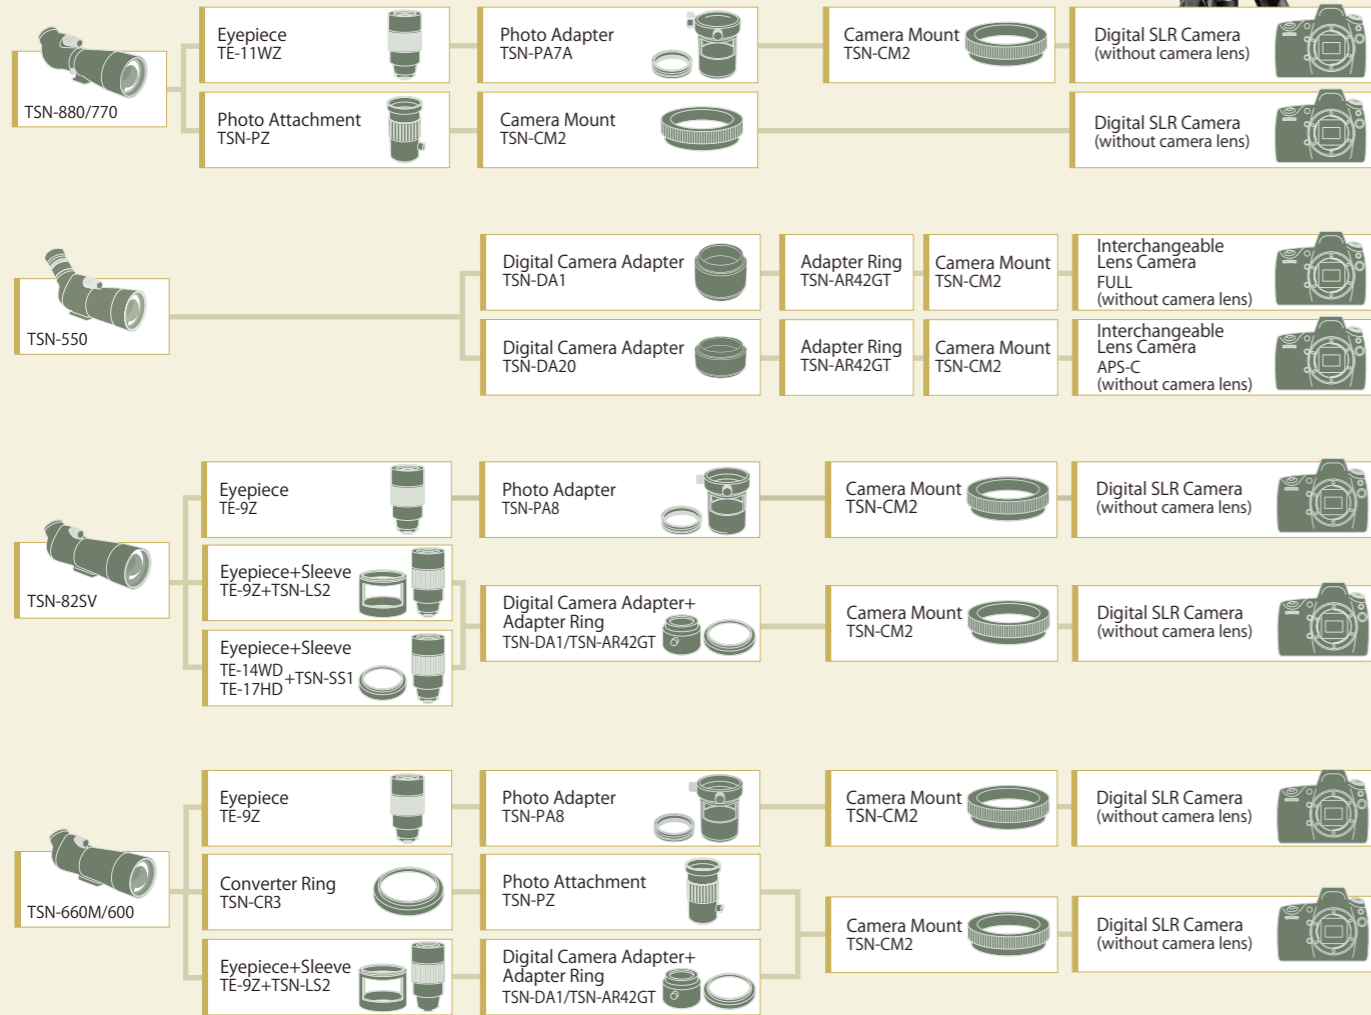

## Compact Digital Camera Digiscoping System Diagram


Attach a compact digital camera to a Kowa spotting scope for Super-telephotography.




[TSN-880 Series, Telephoto Lens/Scope Digiscoping System Diagram]




[TSN-82SV]

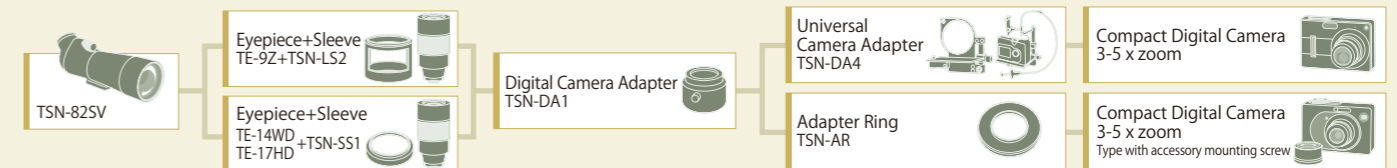

[TSN-550 Series]

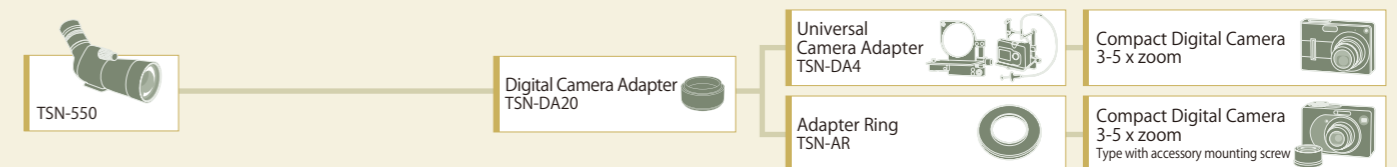


[TSN-660M/600 Series Digiscoping System Diagram]

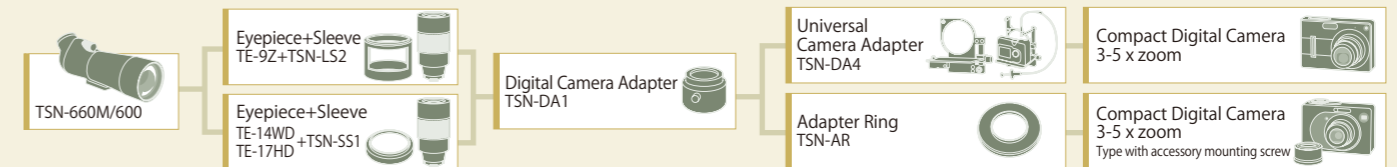

### TSN-DA4 Compatibility

The TSN-DA4 universal camera adapter can be used with cameras that meet the following criteria.

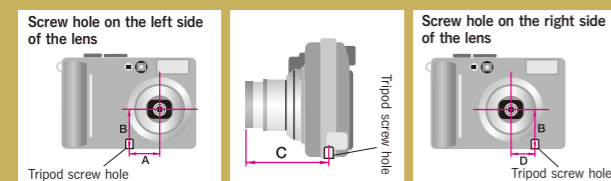

- The TSN-DA4 allows a compact digital camera without filter threads to be used for digiscoping.
- Quickly change between photographing and viewing through the scope.
- The camera is attached to the adapter with the camera's tripod mount. Locking mechanisms ensure safe operation.

A	0~44mm
B	21~40mm
C	~56mm (When the power is switched on and the lens is fully extended)
D	0~28mm
B	21~40mm
C	~56mm (When the power is switched on and the lens is fully extended)



For cameras with the tripod mount to the left of the lens (facing the lens).  
 A. The distance between the center of the tripod mount and the center of the lens.  
 B. The distance between the center of the lens and the base of the camera.  
 C. The distance between the center of the tripod mount and the front of the lens.

For cameras with the tripod mount to the right of the lens (facing the lens).  
 D. The distance between the center of the tripod mount and the center of the lens.  
 B and C are the same as above.

# Specifications

## Spotting Scope

Model	TSN-880 Series		TSN-550 Series		TSN-770 Series		TSN-660M Series	
	TSN-883	TSN-884	TSN-553	TSN-554	TSN-773	TSN-774	TSN-663M	TSN-664M
Objective Lens Effective Diameter	88mm	88mm	55mm	55mm	77mm	77mm	66mm	66mm
Objective Lens	Fluorite Crystal Lens		Fluorite Crystal Lens		XD Lens		XD Lens	
Minimum Focusing Distance	5m(16.4ft)	5m(16.4ft)	3m(9.8ft)	3m(9.8ft)	5m(16.4ft)	5m(16.4ft)	6m(19.7ft)	6m(19.7ft)
Length	343mm(13.5in)	329mm(12.9in)	271mm(10.7in)	288mm(11.3in)	318mm(12.5in)	304mm(12.0in)	311mm(12.2in)	311mm(12.2in)
Weight	1520g(53.6oz)	1520g(53.6oz)	810g(28.6oz)	800g(28.2oz)	1330g(46.9oz)	1330g(46.9oz)	1040g(36.7oz)	1020g(36.0oz)
Filter Thread	95mm	95mm	58mm	58mm	82mm	82mm	72mm	72mm

Model	TSN-600 Series		TSN-500 Series		TSN-82SV
	TSN-601	TSN-602	TSN-501	TSN-502	
Objective Lens Effective Diameter	60mm	60mm	50mm	50mm	82mm
Objective Lens	Fully Multi-coated Lenses		Multi-coated Lenses		Fully Multi-coated Lens
Minimum Focusing Distance	6m(19.7ft)	6m(19.7ft)	2.5m(8.2ft)	2.5m(8.2ft)	6m(19.7ft)
Length	299mm(11.8in)	298mm(11.7in)	241mm(9.5in)	259mm(10.2in)	383mm(15.1in)
Weight	735g(25.9oz)	720g(25.4oz)	400g(14.1oz)	400g(14.1oz)	1490g(52.6oz)
Filter Thread	67mm	67mm	55mm	55mm	86mm

\* Mounting of commercially available filters is possible.

## Telephoto Lens/Scope

Model	500mm F5.6 (with TX10)	350mm F4 (with TX07)	850mm F9.6 (with TX17)
Focal Length	500mm	350mm	850mm
Maximum Aperture	F5.6	F4	F9.6
Lens Construction	7 Elements in 7 Groups	10 Elements in 10 Groups	14 Elements in 13 Groups
Fluorite Crystal Lens	1	1	1
XD Lens	2	3	3
Field of View (Full Size)	4.9°	7.0°	2.9°
F-Number	F5.6~11	F4~8	F9.6~19
Iris Blades	9	9	9
Minimum Focusing Distance	3m(9.8ft)	3m(9.8ft)	3m(9.8ft)
Maximum Reprojection Ratio	0.17x	0.12x	0.29x
Filter Thread	95mm	95mm	95mm
Weight*	1970g(69.5oz)	2025g(71.4oz)	2270g(80.1oz)
Maximum Diameter x Length*	φ 104x341mm (φ 4x13.4in)	φ 104x296.5mm (φ 4x11.7in)	φ 104x396mm (φ 4x15.6in)

\* Using the Nikon mount, excluding the lens hood

## Standard Package

- ① Master Lens
  - ② Mount Adapter "TX10"  
Available Mounts: Nikon, Canon, Pentax, Micro Four-Thirds, SONY "A"
  - ③ Lens Hood "TP-100LH"
  - ④ Objective Cap
  - ⑤ Mount Adapter Cover
  - ⑥ Mount Lens Cover
  - ⑦ Camera Mount Cover
  - ⑧ Sights(S/M/L)
- Manual



## [Eyepiece]

Model	TSN-880/770 Series				TSN-660M/600 Series						TSN-82SV		
	TE-11WZ		TE-20H		TE-9Z		TE-14WD		TE-17HD		TE-9Z	TE-14WD	TE-17HD
TSN-880	TSN-770	TSN-880	TSN-770	TSN-660M	TSN-600	TSN-660M	TSN-600	TSN-660M	TSN-600				
Magnification	25~60x WIDE ZOOM		25xLER		20~60xZOOM		30xWIDE		25xLER		21~63xZOOM	32xWIDE	27xLER
Field of View	2.4° ~1.32°		2.1°		1.9° ~1.0°		2.4°		2.1°		1.8° ~0.95°	2.2°	2.0°
Exit Pupil	3.5~1.5mm	3.1~1.3mm	3.5mm	3.1mm	3.3~1.1mm	3.0~1.0mm	2.2mm	2.0mm	2.6mm	2.4mm	3.9~1.3mm	2.6mm	3.0mm
Relative Brightness	12.3~2.3	9.6~1.7	12.3	9.6	10.9~1.2	9.0~1.0	4.8	4.0	6.8	5.8	6.8~1.7	6.8	9.0
Twilight Factor	46.9~72.7	43.9~68.0	46.1	43.9	36.3~62.9	34.6~60.0	44.5	42.4	40.6	38.7	41.5~71.9	51.2	47.1
Eye Relief	17mm		32.0mm		16.5~16.0mm		20.0mm		32.0mm		16.5~16mm	20mm	32mm
Field of View at 1000m/yds	42~23m/138ft~75ft		37m/121ft		33~17m/108~56 ft		42m/138ft		37m/121ft		31~17m/ 102~56 ft	38m/125ft	35m/115ft

## [Eyepiece]

Model	Telephoto Lens/Scope				
	TE-11WZ	TE-20H	TE-9Z*	TE-14WD*	TE-17HD*
Magnification	28~66x WIDE ZOOM	28x LER	26~78x ZOOM	40x WIDE LER	32x LER
Field of View	2.2° ~1.2°	1.9°	1.45°~0.75°	1.8°	1.6°
Exit Pupil	3.2~1.3mm	3.2mm	3.4~1.1mm	2.2mm	2.7mm
Relative Brightness	10.2~1.8	10.2	11.3~1.3	4.8	7.4
Twilight Factor	49.2~76.2	49.2	48.0~82.8	59.3	53.4
Eye Relief	17mm	32.0mm	16.5~16.0mm	20.0mm	32.0mm
Field of View at 1000m/yds	38~21m/ 125~69ft	33m/108ft	25~13m/ 82~43ft	31m/102ft	28m/92ft

\* Mounting will be possible using the TSN-EC3.

## [Photo Attachment]

Model	TSN-PZ				TSN-PA7A		TSN-PA8		
	TSN-880	TSN-770	TSN-660M	TSN-600	TSN-880/770	Telephoto Lens	TSN82SV	TSN660	TSN600
Supported Scopes	TSN-880	TSN-770	TSN-660M	TSN-600	1000~2450mm	1100~2700mm	1150~3300mm	1050~2950mm	
Focal Length	680~1000mm	560~840mm	560~840mm	560~840mm	12.4~27.8(880)	12.5~30.7	14~40.2	15.9~44.7	17.5~49.2
F Value	7.7~11.4	8.8~13.0	8.5~12.7	9.3~14.0	14.2~31.8(770)				
Minimum Focusing Distance	5m(16.4ft)		6m(19.7ft)		6m(19.7ft)	5m(16.4ft)	6m(19.7ft)	6m(19.7ft)	6m(19.7ft)
Total Length	105mm(4.13in)				100mm(3.94in)		95mm(3.74in)		
Weight	350g(12.3oz)				210g(7.4oz)		200g(7.0oz)		

\* In the case of mounting a digital SLR camera, the focal length will change according to the image sensor size.



## Precautions for use

For correct and safe use of this product:

Before using the product, be certain to carefully read the instruction manual. Do not under any circumstances use this product to look at the sun, since this may result in loss of eyesight.

Names of companies and products described in this pamphlet are the trademarks or registered trademarks of each company.



**Kowa Optical Products Co., Ltd.**

11-1 Nihonbashi-Honcho 4-chome  
Chuo-ku, Tokyo 103-0023, Japan

Phone: 81(3)5651-7061  
Facsimile: 81(3)5651-7310

http://www.kowa-prominar.com

e-mail: info@kowa-prominar.com

**Kowa American Corporation**

20001 S. Vermont Ave.  
Torrance, CA 90502, USA

Phone: +1(800) 966-5692  
Facsimile: +1(310) 327-4177

http://sportingoptics.kowa-usa.com/

e-mail: customerservice@kowa.com

**Kowa Optimed Deutschland GmbH**

Bendemannstrasse 9,  
40210 Düsseldorf, Germany

Phone: +49 (211)54218400  
Facsimile: +49 (211)54218410

http://www.kowaproducts.com/

e-mail: scope@kowaoptimed.com

